


Handing-over Certificate

for hydraulic demolition tools

Bucket crusher BC 2100, BC 2500, BC 3700, BC 5300

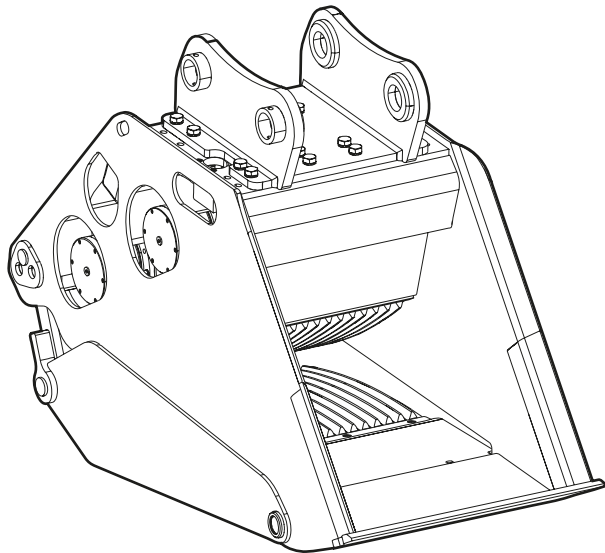

To the Epiroc Customer Center!

To dealers!

To the customers/users!

The Handing-over Certificate is an important document for the subsequent processing of warranty claims.

The warranty period starts on the date of handing-over. It is in the interests mainly of the purchaser/user that the original handing-over certificate is in the possession of the manufacturer, Construction Tools GmbH, as without it warranty claims cannot be processed.

The data and checks required in the handing-over certificate are intended to provide Construction Tools GmbH and the Epiroc Customer Center with basic information and specifically with information about the operating settings of the tool in question. As this information is of importance for subsequent warranty decisions, you are requested to complete the handing-over certificate carefully.

You are kindly requested to make three copies of the signed form.

The purchaser/user keeps one copy. The second copy is for the distributor, the third copy for the Epiroc Customer Center and the original for Construction Tools GmbH.

Please send to the following address:

Construction Tools GmbH
Abteilung Parts & Service/Technical Department
Helenenstraße 149
45143 Essen

Handing-over Certificate BC 2100, BC 2500, BC 3700, BC 5300

1. Information about purchaser/user, excavator and installation

Epiroc Customer Centre:		Equipment model:	
Purchaser/user:		Serial no.:	
Address:		Date of handing-over:	
City:		Original installation:	<input type="checkbox"/>
Excavator manufacturer:		3 rd-party installation:	<input type="checkbox"/>
Excavator type:		Epiroc installation cutter valve:	<input type="checkbox"/>
Excavator serial no.:		Epiroc installation rotate:	<input type="checkbox"/>
Hour meter on carrier:			
Type of application:			
Equipment:			

2. Oil flow and oil pressure measurements in additional circuit for Epiroc equipment

Target value T = 60 - 70 °C T = 140 - 158 °F	BC 2100 140 - 160 l/min at 40 bar					BC 2500 160 - 180 l/min at 40 bar					only on BC 5300		
	BC 3700 180 - 200 l/min at 40 bar					BC 5300 300 l/min at 40 bar							
Pressure (bar) [PSI]	ca. 0 0	20 290	30 435	40 580	50 725	70 1015	110 1595	150 2176	190 2756	230 3336	250 3626	280 4060	320 4640
Flow (l/min) [gal/min]													

BC is running on shear installation:	<input type="checkbox"/> yes	<input type="checkbox"/> no
--------------------------------------	------------------------------	-----------------------------

Final static pressure – forward: _____ bar _____ PSI
 Final static pressure – reverse: _____ bar _____ PSI
 Press. leakage oil line: _____ bar _____ PSI

3. Instructions

Operator has been instructed:	<input type="checkbox"/> yes	<input type="checkbox"/> no
Proper handling explained:	<input type="checkbox"/> yes	<input type="checkbox"/> no
Instr. to avoid damages has been given:	<input type="checkbox"/> yes	<input type="checkbox"/> no

4. Remarks / Handing-over

Service representative's name:

Purchaser's / user's name:

Epiroc Customer Center:

Date and signature:

Date and signature:

