

CX19D



## MINI EXCAVATORS

### D-Series



Engine 3TNV76

Engine power 13.7 kW - 18.6 HP

Operating weight with canopy 1880 kg

Operating weight with cab 1990 kg

0800 64 64 26 | [www.mimico.co.nz](http://www.mimico.co.nz)

**MIMICO**

# SPECIFICATIONS

## CX19D

### ENGINE

Type \_\_\_\_\_ YANMAR 3TNV76 - STAGE 5  
 Max. Power (2200 rpm) (kW / hp) \_\_\_\_\_ 13.7 - 18.6  
 Displacement (cm<sup>3</sup>) \_\_\_\_\_ 1116  
 Number of cylinders (n°) \_\_\_\_\_ 3  
 Cooling \_\_\_\_\_ Liquid  
 Consumption (l/h) \_\_\_\_\_ 3.1  
 Alternator (V) \_\_\_\_\_ 12 (40 A)  
 Battery V (Ah) \_\_\_\_\_ 12 (65)

### HYDRAULIC SYSTEM

Pump type \_\_\_\_\_ variable flow  
 Pump displacement (cm<sup>3</sup>) \_\_\_\_\_ 9 + 9 + 6.6  
 Pump capacity (l/min) \_\_\_\_\_ 18 + 18 + 13.1  
 Max. circuit calibration pressure (bar) \_\_\_\_\_ 240  
 Auxiliary system (max pressure):  
 AUX 1 single or double effect (l/min) \_\_\_\_\_ 31.1 - 205 bar  
 AUX 2 - optional (l/min) \_\_\_\_\_ 13,1 - 205 bar  
 AUX 3 - optional (l/min) \_\_\_\_\_ 18 - 240 bar

### SLEWING & TRAVEL SPEED

Travelling speed  
 (AUTO TWO SPEED) (km/h) \_\_\_\_\_ 1<sup>st</sup> : 0 ÷ 2.3 / 2<sup>nd</sup> : 0 ÷ 4.4  
 Slew speed (rpm) \_\_\_\_\_ 10.5

### CONTROLS


Boom, dipper stick,  
 bucket and turret swing \_\_\_\_\_ 2 pilot joysticks  
 Track movements  
 (included counter rotation) \_\_\_\_\_ 2 pilot levers  
 Dozer blade \_\_\_\_\_ pilot lever  
 Auxiliary system AUX 1  
 (single or double effect) \_\_\_\_\_ electroproportional  
 switch on right joystick  
 Boom swing \_\_\_\_\_ electroproportional switch on left joystick

### OPERATING WEIGHT

Weight with canopy\* (kg) \_\_\_\_\_ 1770  
 Weight with cabin\* (kg) \_\_\_\_\_ 1880  
 Operating weight with canopy\* ISO 6016 (kg) \_\_\_\_\_ 1880  
 Operating weight with cabin\* ISO 6016 (kg) \_\_\_\_\_ 1990  
 \*with rubber tracks



### CIRCUIT AND COMPONENT CAPACITIES

Fuel tank (l) \_\_\_\_\_ 25  
 Hydraulic oil tank (l) \_\_\_\_\_ 20  
 Hydraulic circuit capacity (l) \_\_\_\_\_ 29  
 Cooling system capacity (l) \_\_\_\_\_ 4.5  
 Engine oil (l) \_\_\_\_\_ 2.8

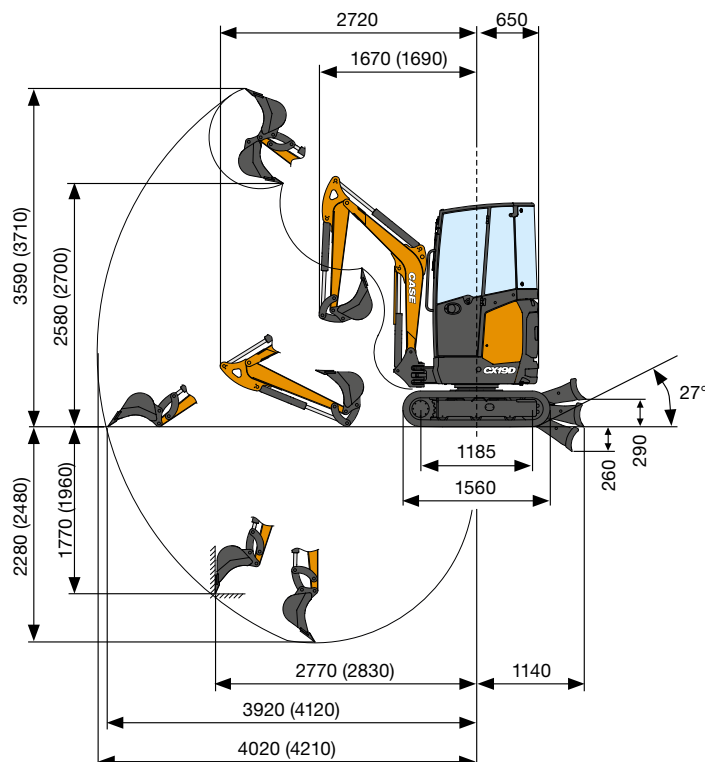

### PERFORMANCE DATA

		Std. Arm 1150 mm	Opt. Arm 1350 mm
Max. digging depth	mm	2280	2480
Max. dumping height	mm	2580	2700
Bucket breaking force	daN	1500	
Arm breaking force ISO 6015	daN	950	
Traction force	daN	1860	
Ground bearing pressure with rubber tracks and canopy (with cabin)	kg/cm <sup>2</sup>	0.31 (0.32)	
Max. slope		60% - 30°	

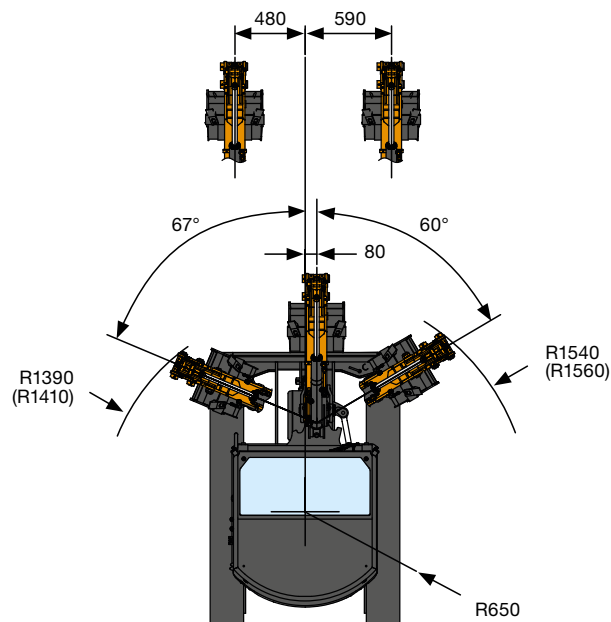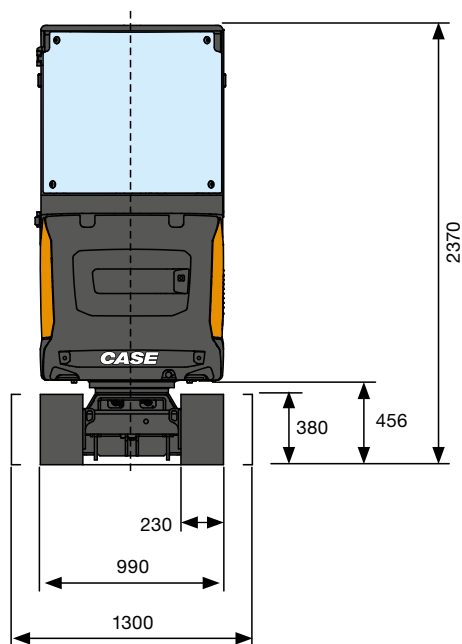

#### GENERAL DIMENSIONS

Maximum width	mm	990 - 1300
Total height	mm	2370
Tracks width	mm	230
Rear rotation radius	mm	650
Digging arm length standard (optional)	mm	1150 (1350)
Rollers number (for each side)	n°	3

## LIFTING CAPACITY

### CX19D

Opening arm from the rotation's center (m)  
Lifting capacity (kg) at 1.0 m height


#### LIFTING CAPACITY

	2	3	Max
Frontal and lowered dozer blade	610*	420*	390*
Frontal and lifted dozer blade	430	230	180
Lateral, open undercarriage	430	230	190

\* Indicates the hydraulic load limit.

The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.

Standard dipper stick L = 1.150 mm  
(Optional dipper stick L = 1.350 mm)

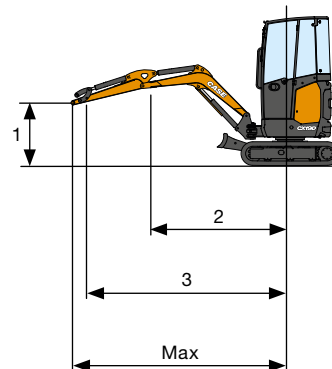

# STANDARD AND OPTIONS

## STANDARD EQUIPMENT

- + Tilttable Cab/Canopy (ROPS/TOPS - FOPS Level 1)
- + Heating
- + Automatic Courtesy light
- + Electric plug on the roof for Rotating Beacon
- + Windshield washer
- + Rear-view mirrors (left, right)
- + Fabric seat with Mechanical suspension (cab)
- + Vinyl seat with Mechanical suspension (canopy)
- + Standard arm
- + Boom Lift cylinder and dozer blade cylinder protection
- + Standard counterweight
- + Servo-assisted hydraulic joysticks with Electro-Hydraulic proportional controls
- + Electro-Hydraulic proportional Swing control
- + 1<sup>st</sup> Auxiliary (AUX1) circuit with Electro-Hydraulic proportional control
- + AUX1 circuit maximum flow mechanical setting
- + Mechanical diverter between Single effect and Double effect AUX1
- + 2 speed travel with Automatic Shift Down (from 2<sup>nd</sup> to 1<sup>st</sup> gear if more traction is required) and Shift-up
- + Rubber tracks
- + Standard Dozer Blade
- + Extendable undercarriage
- + Operator manual
- + Ignition key, which opens every machine lock
- + Standard LED working lights (boom)
- + Battery disconnect switch
- + Variable Volume Pump
- + Standard Hydraulic oil and Lubricants

## OPTIONAL EQUIPMENT

- + DAB Radio, Bluetooth, USB, Memory card SD/SDHC, Aux-in (cab only)
- + Anti-Theft
- + Travel alarm
- + Long arm
- + Additional counterweight
- + 2<sup>nd</sup> Auxiliary (AUX2) circuit with Electro-Hydraulic proportional control and flow diverter from boom swing
- + Grapple provision (AUX3 with flow diverter from bucket cylinder)
- + Direct Drainage to tank
- + Block valves on dozer blade cylinder
- + Object handling kit (block valves on boom and arm, lifting hook and load chart)
- + Extra LED working lights (cab-front and cab-rear)
- + Rotating beacon
- + Case Sitewatch
- + Bio Hydraulic oil and Lubricants
- + High Flow provision (i.e. for Mulcher)
- + Hydraulic quick coupler provision (Single or Double Effect)
- + Mechanical and Hydraulic quick couplers
- + Buckets

## CASE AFTERMARKET SOLUTIONS

- + Front Protection grid (Level 2)
- + Arm cylinder and bucket cylinder protection
- + Pattern change ISO-SAE
- + Vast variety of attachments
- + Full range of Mechanical and Hydraulic quick couplers
- + Full range of Buckets

**CNH Industrial**  
Deutschland GmbH  
Case Baumaschinen  
Benzstr. 1-3 - D-74076 Heilbronn  
DEUTSCHLAND

**CNH Industrial**  
Maquinaria Spain, S.A.  
Avenida Aragón 402  
28022 Madrid - ESPAÑA

**CNH Industrial France, S.A.**  
16-18 Rue des Rochettes  
91150 Morigny-Champigny  
FRANCE

**CNH Industrial Italia Spa**  
via Plava, 80  
10135 Torino  
ITALIA

**CASE Construction Equipment**  
Cranes Farm Rd  
Basildon - SS14 3AD  
UNITED KINGDOM

NOTE: Standard and optional fittings can vary according to the demands and specific regulations of each country. The illustrations may include optional rather than standard fittings - consult your Case dealer. Furthermore, CNH Industrial reserves the right to modify machine specifications without incurring any obligation relating to such changes.

Conforms to directive 2006/42/EC