SD2500WS

Highway Pavers

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.The above information is a general description only, all informations are supplied without liability.

Technical Data

Material hopper

Capacity	6.0 m³
Dumping height (center/outside)	574 mm /587 mm
Hopper width, internal	3.29 m

Conveyor

Conveyor type	Dual bar feeder
Conveyor control	The independent conveyor with proportional contro
Conveyor width	2x 580 mm

Engine

Manufacturer/Model	Cummins QSB6.7-C173
Emissions according to	Stage V
Peak Power	145 kW
Rated power, SAE J1995	129 kW @ 2200 rpm
Electrical system	24 V
Fuel tank capacity	268 l
Average fuel conumption	9.45 l/h
After treatment	DOC + DPF + SCR

Engine

Manufacturer/Model	Cummins QSB6.7-C173
Emissions according to	Stage IIIA (Tier 3)
Rated power	129 kW @ 2200 rpm
Peak Power	145 kW
Electrical system	24 V
Fuel tank capacity	306 l
Average fuel conumption	9.45 l/h

Auger

Auger diameter	380 mm
Auger control	Automatic with ultrasonic sensors

Dimensions

Front ramp angle	17°
Working width, max.	9 m
Working width, minimum (with reducing shoe)	2.05 m
Basic width	2.55 m

Masses

Basic weight (incl. standard screed)	18 t

Capacity

Placement thickness (max)	300 mm
Theoretical placement capacity	750 t/h

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.The above information is a general description only, all informations are supplied without liability.

SD2500WS

Highway Pavers

Dimensions

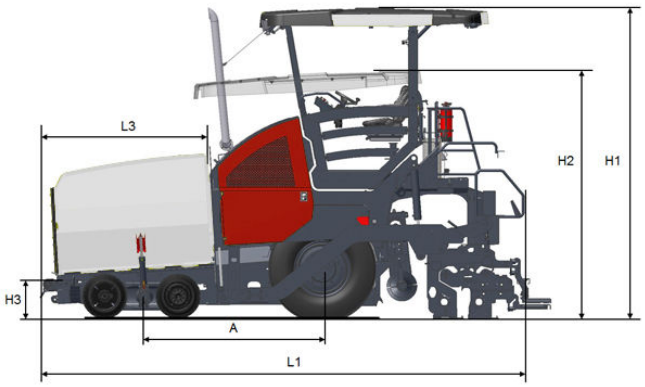

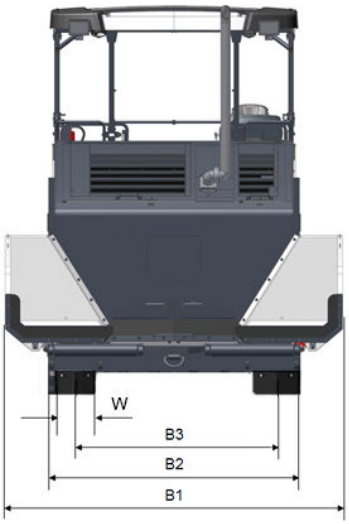

A. Axle track	
A. Wheelbase	2.24 m
B1. Width, max.	3.25 m
B2. Width, standard	2.55 m
B3. Width, wheel track	2.05 m
C1. Track width	
H1. Height, max.	3.90 m
H2. Height, transport	3.10 m
H3. Height	0.49 m
L1. Length	6.10 m
L3. Length, hopper	2.12 m
W. Width, wheels	0.30 m

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.The above information is a general description only, all informations are supplied without liability.

Screeds

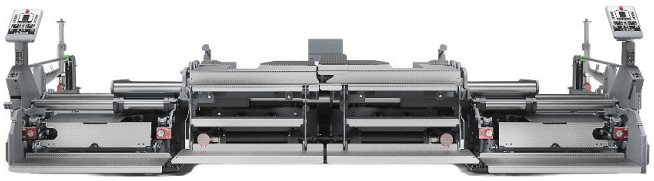

V5100 TV / TV E

V6000 TV / TV E

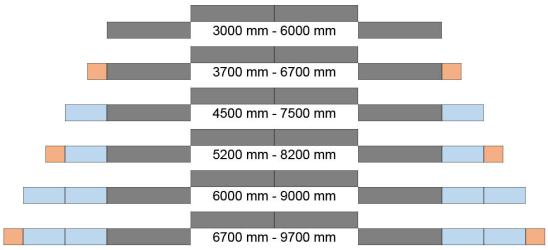

Legend

- 1275 mm V5100 section
- 1500 mm V6000 section
- 750 mm extension box
- 350 mm extension box

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.The above information is a general description only, all informations are supplied without liability.